flexi-mesh®

Flexible by design. Flexible in application.

Product Data Sheet

hamma® X STRAND 7X7

Code: FLEXI-7715-018

1.5mm 7x7 AISI316 WIRE ROPE MESH

Product Type	STAINLESS STEEL WIRE ROPE MESH
Flexibility	FLEXIBLE
Wire Rope Construction	7x7
Material	STAINLESS STEEL
Material Type	AISI316
Specification	DIN 3055
Finish	ULTRASONIC BATH
Nominal Diameter (Metric)	1.5mm
Approx. Net Weight	2.9kg/m2
Min. Breaking Load (Wire Rope)	129kgf or 1.27kN
Light Transmission	81%
Wire Rope Origin	KOS (KOREA'S ORIGINAL STAINLESS) – SOUTH KOREA
Mesh Aperture	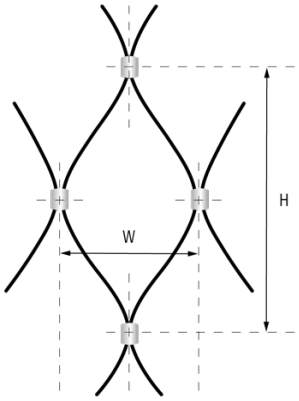 Width (W) 18mm Height (H) 32mm
Node Strength	 Longitudinal Strength 0.8kN  Transversal Strength 2.3kN

NOTE:

Information provided for Minimum Breaking Load (MBL) is the minimum requirement for the wire rope to meet Flexi-Mesh standards. Actual Breaking Load (ABL) will exceed this and can be found on the Mill Certificate for individual production runs. Mill Certificates can be provided with your next Purchase Order.

Contact us on **1800 272 879** or email projects@fleximesh.com

Flexi-Mesh is exclusively owned by Arcus Wire Group

ARCUS WIRE GROUP
MARINE • INDUSTRIAL • ARCHITECTURAL
IT'S DOWN TO THE WIRE®